


General specifications

Circuit	: ON-ON(2P2T)
Rating	: D.C. 50V 0.5A
Contact R.[max]	: D.C. 5V 1A 30mΩ
Insulation R.[min]	: D.C. 500V 100MΩ
Withstand VOL.	: A.C. 500V 1 minute
Timing	: Non Shorting
Operating force	: 300±100g
Life cycle[max]	: 10,000 CYCLES

SCHEMATIC

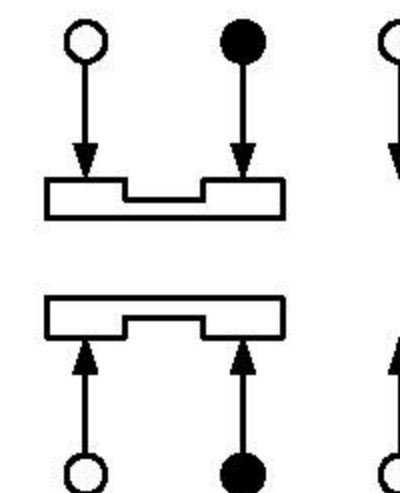

MATERIAL SPECIFICATIONS

ITEM	PART NAME	MATERIAL	QTY	FINISH
A	KNOB	POM	1	Black
B	FRAME	Steel Strip	1	Black
C	TERMINAL BASE	Phenolic Resin	1	Black
D	TERMINAL	Brass Strip	6	Ag Plated Over Ni Plated
E	CONTACT	Brass Strip	2	Ag Clad
F	SPRING	Steel Wire	2	Temper

比例 SCALE 1 : 2

單位 DIMENSION m m

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE

UP TO 10 ±0.3

ABOVE 10 TO 100 ±0.5

ABOVE 100 ±0.8

ANGULAR DIMENSIONS ±5°

品名 TITLE

SLIDE SWITCH

型號 MODEL


B140B

繪圖
DRAWN

MKL 2006/05/26

核准
APPROVED

HSH 2006/05/26



版次
REVISION

A

日期
DATE

2006/05/26